


Fußventil PN 10

POM/PE


- Innengewinde nach DIN ISO 228

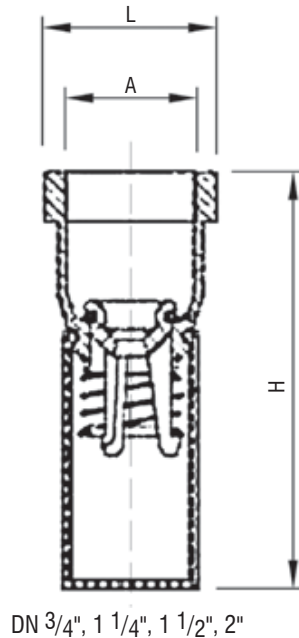

Foot Valve PN 10

POM/PE

- female thread acc. to DIN ISO 228

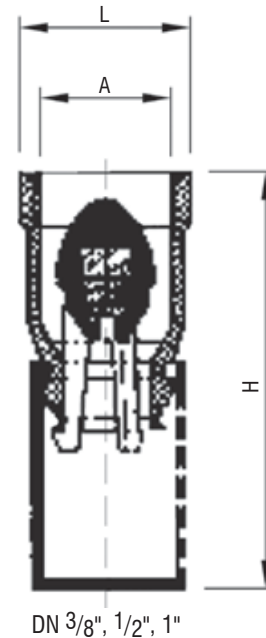

AW-Nr. AW no.	Pos. item	Bezeichnung denomination	Werkstoff material	nach DIN EN acc. to DIN EN	Werkstoff-Nr. material no.
1133	1	Gehäuse / body	POM (Polyacetal)	EN-GJL-250	EN-LJ1040
	2	Ring / ring	POM (Polyacetal)		
	3	Schließersystem closing system/disc	DN 3/8" - DN 1/2": PA (Polyamid) > DN 1/2": POM (Polyoximethylen)		
	4	Feder / spring	Edelstahl / stainless steel	X5CrNi18-10	1.4301
	4	Dichtung / gasket	EPDM		
	5	Sieb / strainer	PE (Polyethylen)		

"	A mm	L	H	K _v m ³ /H	≈ kg
3/8"	12 / 17	23	56	2,90	0,015
1/2"	15 / 21	27	56	2,90	0,020
3/4"	20 / 27	31	75	7,60	0,044
1"	26 / 34	40	95	11,20	0,073
1 1/4"	33 / 42	49	119	21,40	0,125
1 1/2"	40 / 49	56	148	27,80	0,170
2"	50 / 60	66	180	41,10	0,190

Temperatur / temperature	-10°C bis / up to 60°C
---------------------------------	-------------------------------

Verwendung

klare Flüssigkeiten, hartes Wasser, Seewasser,
 einige chemikalische Produkte auf Anfrage

Application

clear liquids, hard water, sea water,
 some chemical products on request